



Berth Scour Protection

System description

proserve
MARINE CONSTRUCTION ENGINEERS

 **HUESKER**
Ideas. Engineers. Innovations.



Berth Scour Protection - Using Concrete Mattress

Berth Scour Aprons

These provide protection to quay structures against:

- Propeller Scour
- Ro Ro Fast Ferry Jet Scour
- Bow Thrusters
- Wave and Current Action

The Concrete Mattress System

Mattress fabric is pump filled insitu with micro concrete:

- Creates robust interlocking concrete slabs underwater and is often used for berth protection
- Unlike rock armour, it does not suffer from rolling or sliding displacement
- High performance system - resisting jet flow up to 41 f/s
- Much lower mattress thickness saves dredging and importantly reduces wall span height




Proserve and HUESKER combine their skills for berth protection to many regions. Proserve engineer and fabricate mattress systems to suit site conditions using HUESKER'S woven Incomat® mattress.

The system is lightweight (20.6 oz/yd²) for handling and transportation and can be used by contractors and divers worldwide. Proserve undertake scour apron design using appropriate design guides and proven performance. Proserve provides engineering support for installation worldwide.



Berth Scour Actions

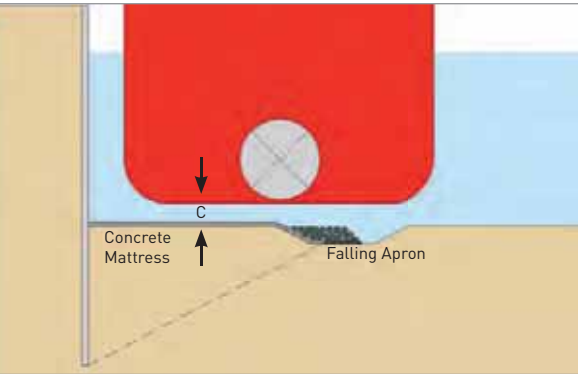


Case Histories: Cotonou; Belfast VT4 Ferry Berth
 Technical Note: Berth Protection Using Concrete Mattress

Propeller Scour

Concrete mattress aprons are typically designed to resist propeller suction as they readily resist propeller flow. Design guides are used to estimate suction uplift forces on the bed. The principal parameters affecting suction and thus mattress thickness are:

- Propeller tip clearance to bed (C)
- Propeller diameter
- Engine power used on berth

Mattress edges often have a stone falling apron to protect against underscour.

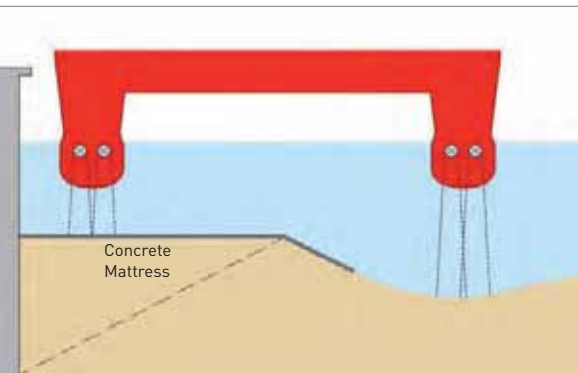


Case Histories: Belfast VT4 HSS Berth; Portsmouth
 2013 Paper: Berth Scour Protection for Fast Ferries

Jet Scour

Large Ro Ro Fast Ferry vessels have jet exit velocities up to 75.5 ft/s. Jet deflection during mooring creates high speed jet impact onto berth beds. Where berths are unprotected, very significant scour holes up to 29.5 ft deep have been created in soft deposits. Mattress is designed to resist suction uplift based on CFD modelling and comparison with proven usage.

Concrete mattress has performed well for this extreme action in jet flow up to 41 ft/s. Many other protection types have failed.

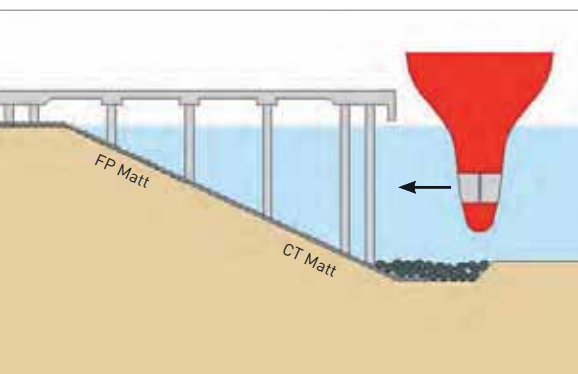

Case Histories: Shell Jetty, London Gateway

Bow Thrusters, Wave and Current Action

Bow thruster jets acting against jetty slopes are readily protected by concrete mattress cast around the jetty piles. A porous filter point (FP) mattress is generally used in the tidal/wave zone and a constant thickness (CT) mattress used to the lower slopes. Filter point mattress is designed for wave action using established guidance based upon relative mattress and soil permeability. Design against currents is not usually critical for mattress in ports.



Concrete Mattress System

Concrete Mattress System


Concrete mattress system has 50 years of proven usage. The mattress aprons are normally formed by divers rolling out mattress fabric underwater which is pump filled with highly fluid small aggregate concrete. The fluid concrete is protected against wash out by the mattress fabric.

Joints between mattress panels are formed using zipped or sewn 'ball and socket' shear joints, this produces an apron of interlocked good quality concrete slabs underwater. Where ground settlement is expected movement joints can be engineered. Mattresses are typically pump filled with a 2:1 sand:cement micro concrete mix of 5,076 lb/in² strength which has proven durable over the past 50 years.



Incomat® Standard (CT)

This is normally used on harbour beds and permanently submerged slopes. Mattress aprons readily cope with high propeller and jet velocities with relatively low thickness when compared with rock protection. Thicknesses of 3.95 in to 23.6 in are available with a 7.87 in minimum thickness recommended for controlled maintenance dredging to beds of large berths. Weep holes can be incorporated to cope with any residual ground water tidal movement.

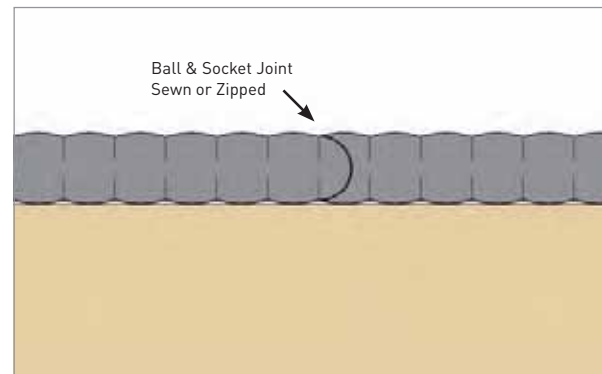


Incomat® Filterpoint (FP)


The porosity of the woven in filters allows this mattress to be used to slopes in tidal ranges for wave heights (Hs) up to 3.28 ft to 4.92 ft. Typical FP matts, FP150 and FP225 have overall thickness of 5.9 in and 8.86 in, with an average thickness of 3.95 in and 5.9 in respectively. A geotextile fabric is required under the mattress for longer term protection.

Engineering Control

Mattress fabric, Incomat® is developed and woven by HUESKER'S innovation and engineering. Proserve's engineers undertake design, mattress fabrication and installation support; using risk management and quality control systems suitable for submerged maritime works. Engineering experience is used to tailor mattress systems to suit berth working conditions.

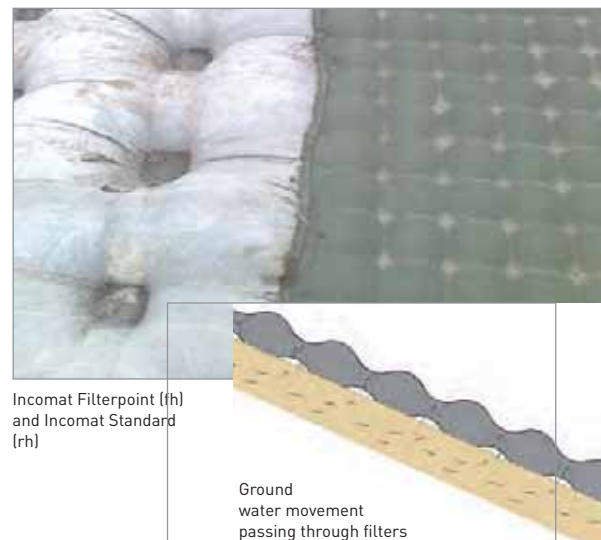


Advantages of Concrete Mattress

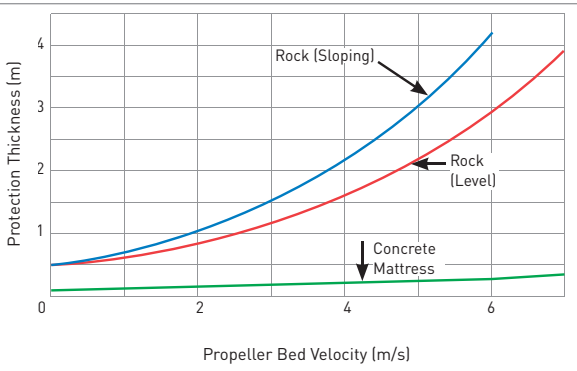

Lower Thickness - Higher Performance

Concrete mattress has a low relative thickness compared to other protection systems because it creates reliable interlocked concrete slabs on the seabed or submerged slopes. The concrete is highly durable and gives high performance up to 41 ft/s in jet flow (Stranraer).

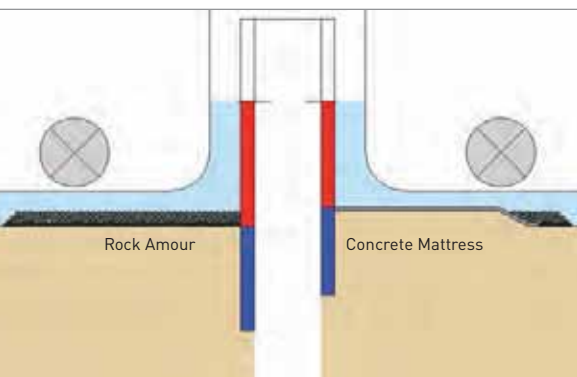


Quay Wall Design - Cost Savings

The reduction in protection layer thickness creates significant savings in the design of quay wall structures from:

- Reduced pile clear span or structure height
- Reduced pile or structure embedment
- Reduced dredging volumes

Sloping Construction - Toe Protection

Uniquely, it is the only insitu system that can be used on slopes, allowing sloping toe trench edge details with stone falling apron edges which are good practice. Other systems with open insitu joints can't create these important toe details.

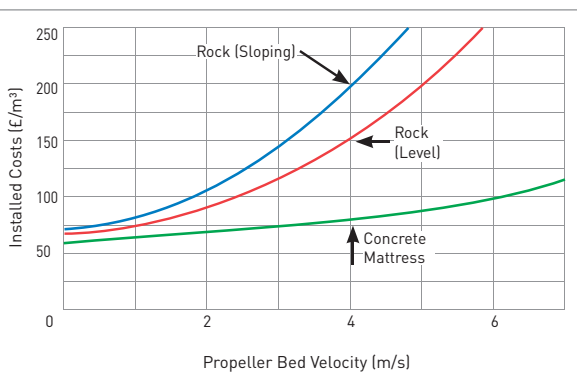

Health & Safety - Environment

The mattress system is lightweight fabric, which makes it much safer for divers to install relative to heavy preformed systems which risk diver entrapment. Environmentally it reduces dredging and material quantities and avoids wash out of cement.

Lower Installed Costs

Concrete mattress has a lower cost than typical rock armour. In addition it offers superior performance in comparison to conventional rock revetments.



Advantages of Concrete Mattress


Constructability - Avoids Wash Out

Expensive marine plant is usually not needed as concrete mattress is normally installed by divers working from the quay wall or top of revetment slopes. Typical installation rates per dive team are 1,345 ft²/ day (Belfast) to 3,229 ft²/ day (Cotonou) depending upon working conditions. The system can be used on undulating beds and slopes and does not require expensive bed levelling preparation. Diver time can be reduced and output increased by using pre installed layflat hoses for automated filling.

Washout from currents or vessel actions is prevented whilst setting. This creates reliable protection in comparison to grouted rock or tremi concrete.



Cotonou; Benin

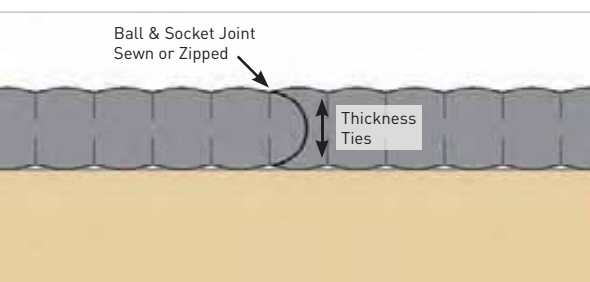

Case Study: Propeller Scour

2 new container berths have been constructed at the port of Cotonou with a depth of 49.2 ft to accommodate larger container vessels. Proserve were engaged to design the scour protection apron and supply the required concrete mattress. The scour apron was designed to resist the suction forces due to container vessel propeller action, 9.45 in and 5.9 in thick CT Constant Thickness mattresses Incomat® Standard were used. The lower construction thickness of concrete mattress provided a cost effective solution and importantly minimised the span height of the quay wall and maximised its protected embedment depth.

A local micro concrete mix was developed, initially with pumping and mattress filling trials. The mattress system was diver installed using the roll out technique and then pump filled automatically via pre installed lay flat hoses. 17,940 yd² of mattress was installed in some 6 weeks using 2 large dive teams. A rip rap stone falling apron edge detail was provided to overcome edge scour in the sand and clay bed.




London Gateway; Shell Jetty

Case Study: Bow Thruster, Wave and Current Action

The existing Shell Jetty was deepened for larger vessels and the existing revetment slopes required protection from bow thruster erosion. The working conditions were difficult with tidal currents to 5.25 ft/s, a design wave height of 3.6 ft and soil investigation showed a layer of soft silt to slopes up to 4.92 ft thick with an estimated settlement of 2.75 in-5.51 in.

A 5.9 in thick cast insitu concrete mattress system was designed with crack and movement control joints at 7.22 ft and 9.84 ft centres to accommodate settlement. An FP225 porous filter point mattress was used in the tidal range with a geotextile under layer pre-sewn to the mattresses. Lower slopes subject to bow thrusters wash were protected by CT150 mattress. Toe trenches were provided to mattress edges to protect against underscour. A site specific mattress installation, developed by Proserve and contractor Kaymac, with mattress panels system custom designed and fabricated to aid rapid panel installation, in diver working periods limited typically to some 1.5 hours. The mattress was fabricated for installation around existing piles, with a sliding steel and mattress collar formed to cope with expected settlement.

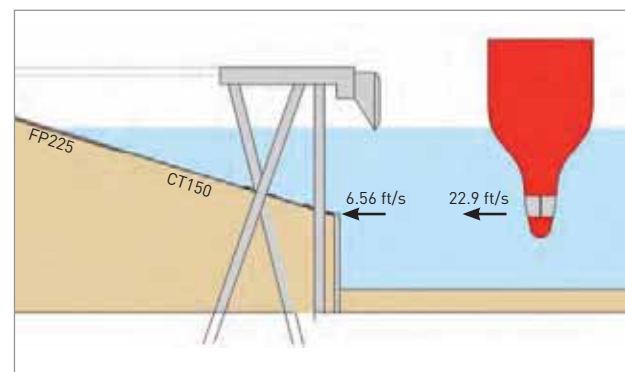



Belfast VT4, HSS Berth

Case Study: Jet Scour


The HSS berth at Belfast Harbour was moved seaward to Victoria Terminal 4 in 2008 to accommodate large HSS vessels. Significant bed protection works were required to the berth to protect the piled combi wall span height and embedment depth.

The large HSS had high velocity exit jets up to 75.5 ft/s. Mooring jetting action onto the bed created by deflection buckets during berthing at Stranraer had created a major scour hole into the soft deposit bed under the unprotected area of the outer hull, some 29.5 ft deep. The inner hull area had successfully been protected by concrete mattress.

A mattress thickness of 13.8 in was installed to protect the passive support areas to the quay wall. The unprotected areas under the mooring jetting of the outer hull were eroded some 5m in 18 months into the soft deposits. A layer of very soft clay (sleech) at design formation level was removed to ensure necessary support to the concrete mattress apron to withstand the jetting contact pressures. Mattress panels were limited to 32.8 ft long as a precaution against any slight settlement.



Combined mattress panels typically 98.4 ft long were rolled out by divers and zip connected to form 'ball and socket' shear joints. A 5,076 lb/in² micro concrete mix was used to pump fill the mattress using a long reach boom pump. Typical installation rates were 119 yd²-155yd²/day per dive team. The scour apron comprised 5,621yd² of mattress.

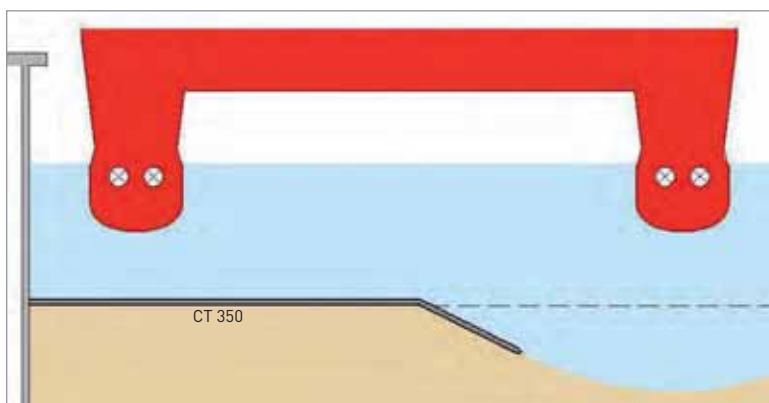



HUESKER inc.

10701-W South Commerce Boulevard
Charlotte, NC 28273
Phone: (704) 588-5500, (800) 942-9418
Fax: (704) 588-5988
E-mail: marketing@hueskerinc.com
Internet: www.huesker.com

